


Given a graph, we define “proper coloring” as coloring of the graph nodes in such way that no two adjacent nodes have the same color. If we map each color to a positive integer, we can calculate the sum of all colors assigned to the graph.

In this problem you will be given a tree (connected graph with no simple loops). Can you determine what the minimum color sum can be achieved when the tree is properly colored? (Image to the right shows a proper coloring of the second example tree with sum=11)

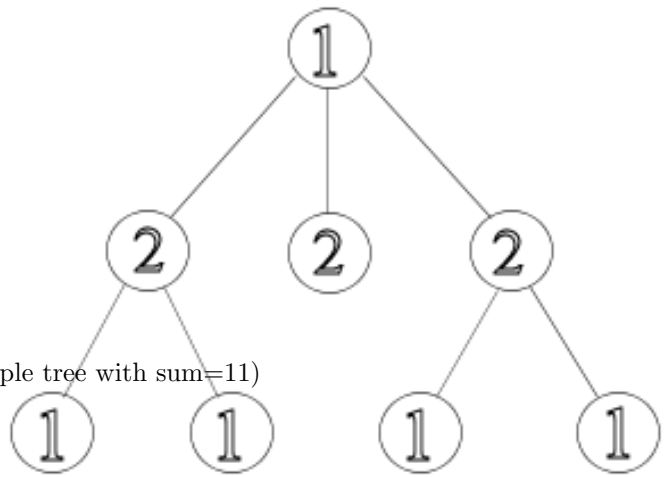

Input

The input file consists of several test cases. Each test case starts with n ($1 \leq n \leq 10000$), the number of nodes in the tree. Next n lines will be of the form “ $u: v_1 v_2 \dots v_k$ ” where u is the root of a subtree and v_i 's are its children ($0 \leq u, v_i \leq n - 1$).

Every test case will be followed by a blank line. Input ends with a case $n = 0$, which should not be processed.

Output

For each test case print the minimum sum of colors that can be achieved by some proper coloring of the tree.

Sample Input

```

2
0:
1: 0

8
0: 1 2 3
1: 4 5
2:
3: 6 7
4:
5:
6:
7:

0
  
```

Sample Output

```

3
11
  
```